



BRINGS NATURE IN

Polycarbonate Profiles

Notes for Installation

1. Polygal's profiles must be installed with the solar protected layer facing out.
2. Use a rubber mallet to engage cap into base profile. Make sure you fully couple the two profiles along their entire length.
3. When calculating rebate depth between sheet and profile, make sure you allow for the material's thermal expansion.
4. Calculate the width and the allowed load using Polygal Technical Support (PTS) software.
5. Maintain a minimal inclination of 10% when installing in flat structures.
6. Profiles are supplied in standard 6-meter lengths. Other lengths are available-contact your distributor for details.

Note: The information in this brochure is intended for technical service and information purposes only. Polygal has undertaken to ensure that the information presented is accurate and reliable. Polygal and its representatives shall not be responsible for damage resulting from the use or installation of products by roofing contractors or other persons.

Yasouf YZK Koer

pprot-en-1109-04



BRINGS NATURE IN

Distributed by:



POLYGAL
Plastics Industries Ltd.
Ramat Hashofet 19238, Israel
Tel: 972-4-9596222,
Fax: 972-4-9596284,
E-mail: sales@polygal.com

POLYGAL Inc.
P.O.Box 410592, Charlotte,
NC 28241 USA
Tel: 1 704 588 3800,
Fax: 1 704 588 7400,
E-mail: usasales@polygal.com

Polygal Vostok Ltd.
Russia, Moscow, Godovikova Str. 9,
build. 3, office 410.
Tel: (495) 783 83 28,
Fax: (495) 783 83 29
E-mail: vostok@polygal.com

Polygal Sud S.A.
Los Nogales S/N, Lote 21 - 22,
Condomino Industrial Segunda Orbital,
Comuna de Lampa, Santiago - Chile
Tel: 56-2-392-0000, Fax: 56-2-392-0045
E-mail: sudsales@polygal.com

www.polygal.com

Technical Support E-mail: techsupport@polygal.com

Polygal Polycarbonate Profiles

Polygal Polycarbonate Profile (dimensions in mm)	Cat. No.	Function	Sheet Thickness	Polygal Polycarbonate Profile (dimensions in mm)	Cat. No.	Function	Sheet Thickness
	200	HP 4 Sheet Connector (Integrated)	4 mm		229	UP 4 Edge Profile	4 mm
	201	HP 6 Sheet Connector (Integrated)	6 mm		212	UP 6 Edge Profile	6 mm
	202	HP 8 Sheet Connector (Integrated)	8 mm		213	UP 8 Edge Profile	8 mm
	203	HP 10 Sheet Connector (Integrated)	10 mm		214	UP 10 Edge Profile	10 mm
	204	HP 16 Sheet Connector (Integrated)	16 mm		215	UP 16 Edge Profile	16 mm
	208	SP 6 Sheet Connector (Cap)	6 mm		220	FP 6 Side Profile	6 mm
	209	SP 8,10 Sheet Connector (Cap)	8,10 mm		222	FP 8,10 Side Profile	8,10 mm
	205	SP Base A Sheet Connector	6,8,10 mm		223	FP 16 Side Profile	16 mm
	210	HCP Cap Sheet Connector	8,10 mm		226	Side Spacer	8,10 mm
	211	HCP 16 Cap Sheet Connector	16 mm				
	207	HCP Base Sheet Connector	8,10, 16 mm				
	231	ECP Cap Sheet Connector	6,8, 10 mm				
	230	ECP Base Sheet Connector	6,8, 10 mm				
	216	RP 6 Ridge	6 mm				
	218	RP 8,10 Ridge	8,10 mm				
	219	RP 16 Ridge	16 mm				

1. — UV Protected
 2. Standard length of Profile - 6 m. For a different length please contact Polygal office.
 3. Profile dimensions could be changed by Polygal without prior notice.

Polygal is the leading manufacturer of structured Polycarbonate panels, and is known throughout the world for the outstanding quality of its products. Polygal was the first manufacturer in the world to create structured Polycarbonate panels, and over the last 30 years has developed and produced a broad spectrum of these products, which are successfully covering a full array of structures worldwide.







Polygal Accessories

*Screws	Cat. No.	Measurement	Description	Function
	412	1/4" x 1"-1/4"	Base profile anchoring screw (BPS)	Connection to Metal Construction
	400	1/4" x 2"	Polygal sheet anchoring screw (PSS)	Connection to Metal Construction
	421	1/4" x 1"-1/4"	Base profile anchoring screw (BPS)	Connection to Wood Construction
	422	1/4" x 2"	Polygal sheet anchoring screw (PSS)	Connection to Wood Construction

*1. 3/8" Hex Socket Head
 2. Specially coated for condensation environments

Sealing tapes	Cat. No.	Width		Suitable for Sheet thickness		Description	Standard length of Rolls	
		mm	inch	mm	inch		m	ft
	508	25	1"	4, 6, 8	5/32", 1/4", 5/16"	Antidust Tape (AST)	33	108'
	509	38	1 1/2"	10, 16	3/8", 5/8"			
	512	25	1"	4, 6, 8	5/32", 1/4", 5/16"	Solid Tape (SST)	50	164'
	513	38	1 1/2"	10, 16	3/8", 5/8"			

Seals	Cat. No.	Suitable for Sheet thickness		Description
		mm	inch	
	474	All thickness		EPDM + INOX Fixing dome
	506	6	1/4"	Fixing Button
	516	10	3/8"	
	517	16	5/8"	
	505			Pa 080 inside spacer for Greenhouses (28/4.7mm) inter holl - 4.5 mm
	080			Pa 060 Sealing Strip (4/20mm)
	507			POLYGAL Silicon

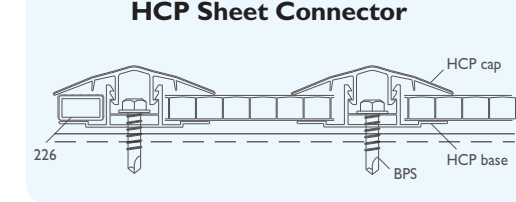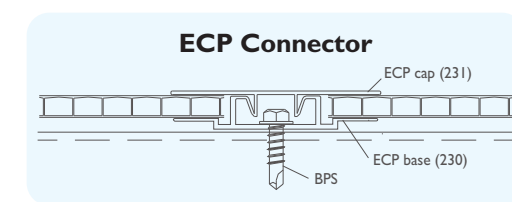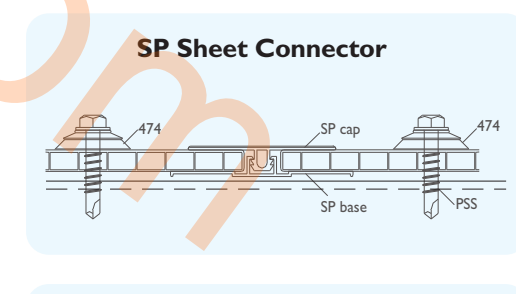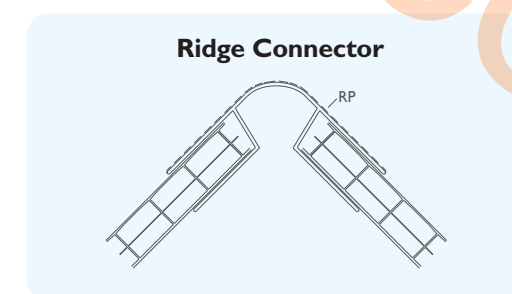

The data in this advertisement are provided in good faith and constitute general information without commitment, and no warranty is given or implied. Polycarbonate is a combustible thermoplastic that complies with various international standards, as customary in each country. Avoid exposure to excessive heat or aromatic cleaning solvents. Normal fire precautions should be taken to protect against combustion.